

1771-P4S1


Allen Bradley PLC – PLC 5

| Technical Specifications: | |
|---------------------------|-----------------------------------|
| Manufacturer | Rockwell Automation |
| Brand | Allen-Bradley |
| Part Number/Catalog No. | 1771-P4S1 |
| Module Type | Power Supply |
| Nom Input Voltage | 100 Volts AC |
| Input Voltage Range | 85-120 Volts AC |
| Max Real Input Power | 56 Watts |
| Max Apparent Input Power | 89 VA |
| Max Xformer Load | 140 VA |
| User Output Current | N/A |
| Backplane Output Current | 8 Amperes (at 5 Volts DC) |
| Frequency | 47-63 Hertz |
| Fuse | 1.5 Amperes, 250 Volts, slow-blow |
| Cabling | 1771-CT |
| Paralleled | #NAME? |
| Location | 1771 Chassis, 1 Slot |
| Dimensions | 1 Chassis Slot |

DO Supply Inc. DOES NOT WARRANT THE COMPLETENESS, TIMELINESS OR ACCURACY OF ANY OF THE DATA CONTAINED on this PDF document. ALL INFORMATION CONVEYED HEREBY IS PROVIDED TO USERS "AS IS." IN NO EVENT SHALL DO Supply Inc. BE LIABLE FOR ANY DAMAGES OF ANY KIND INCLUDING DIRECT, INDIRECT, INCIDENTAL, CONSEQUENTIAL, LOSS PROFIT OR DAMAGE.

Product Images



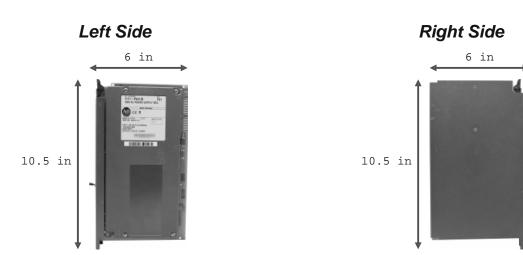

DO Supply Inc. DOES NOT WARRANT THE COMPLETENESS, TIMELINESS OR ACCURACY OF ANY OF THE DATA CONTAINED on this PDF document. ALL INFORMATION CONVEYED HEREBY IS PROVIDED TO USERS "AS IS." IN NO EVENT SHALL DO Supply Inc. BE LIABLE FOR ANY DAMAGES OF ANY KIND INCLUDING DIRECT, INDIRECT, INCIDENTAL, CONSEQUENTIAL, LOSS PROFIT OR DAMAGE.